






CHŁODNICE FANCOLD SD... 30

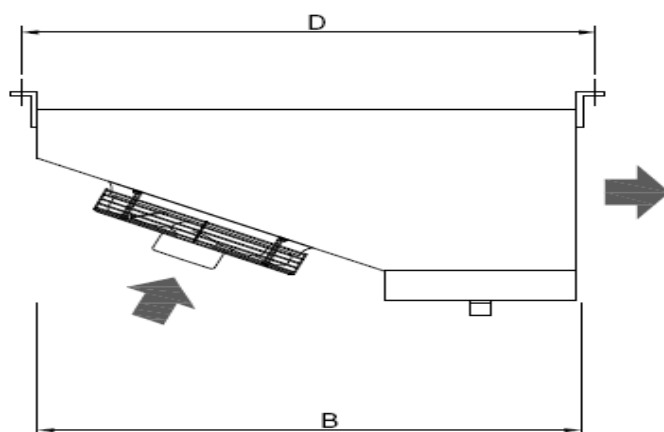

***MAŁE CHŁODNICE PODSUFITOWE O JEDNOSTRONNYM
WYDMUCHU***

Chłodnice SD. ..30

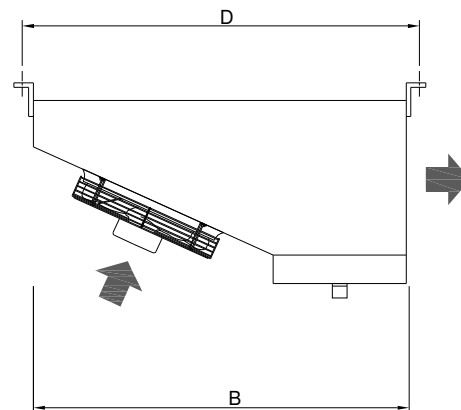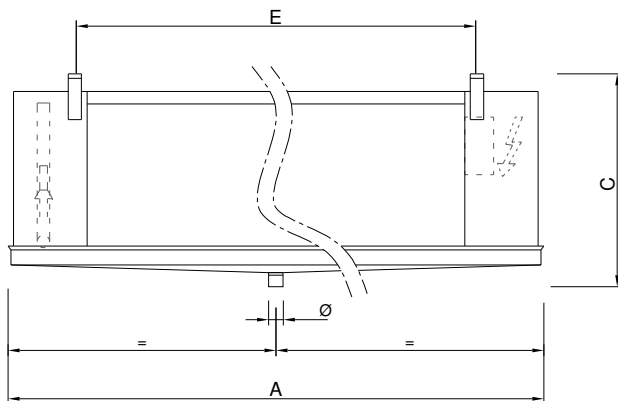

Model	[n°]	Wymiary					Przylączy		Odpływ
		A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	IN [SAE]	OUT [mm]	
SD.x.30.1.xx	1	1020	715	300	750	630	1/2"	16	1"
SD.x.30.2.xx	2	1620	715	300	750	1230	1/2"	22	1"
SD.x.30.3.xx	3	2220	715	300	750	1830	1/2"	22	1"
SD.x.30.4.xx	4	2820	715	300	750	2x1215	5/8"	28	1"
SD.x.30.5.xx	5	3420	715	300	750	2x1515	5/8"	28	1"-1/4

Kod	Silnik	Średnica [mm]	Zasilanie	Obroty [RPM]	Moc [W]	Prąd [A]	dB(A) 5 metrów
- 4M	4 poles	315	230/1/50	1370	95	0,42	48

Typ S: rozstaw lamel 3 mm

Model	Wydajność SC2	Przepływ	Powierzchnia	Odtajanie elektryczne	Wentylatory	Średnica
	kW	m ³ /h	m ²	kW	n	mm
SD.S.30.1.04-4M	1,9	1200	11	0,8	1	315
SD.S.30.1.06-4M	2,3	1050	17	1,2	1	315
SD.S.30.2.04-4M	3,9	2400	23	1,4	2	315
SD.S.30.2.06-4M	4,8	2100	34	2,2	2	315
SD.S.30.3.04-4M	5,9	3600	34	2,2	3	315
SD.S.30.3.06-4M	7,2	3150	51	3,8	3	315
SD.S.30.4.04-4M	7,9	4800	46	2,7	4	315
SD.S.30.4.06-4M	9,7	4200	68	4,5	4	315
SD.S.30.5.04-4M	10,1	6000	57	3,3	5	315
SD.S.30.5.06-4M	12,1	5250	86	5,5	5	315

Typ H: fin spacing 4,5 mm

SD.H.30.1.04-4M	1,7	1250	8	0,8	1	315
SD.H.30.1.06-4M	2,1	1100	12	1,2	1	315
SD.H.30.2.04-4M	3,4	2500	16	1,4	2	315
SD.H.30.2.06-4M	4,4	2200	24	2,2	2	315
SD.H.30.3.04-4M	5,1	3750	24	2,2	3	315
SD.H.30.3.06-4M	6,6	3300	36	3,8	3	315
SD.H.30.4.04-4M	7,1	5000	32	2,7	4	315
SD.H.30.4.06-4M	8,8	4400	48	4,5	4	315
SD.H.30.5.04-4M	8,9	6250	40	3,3	5	315
SD.H.30.5.06-4M	11,2	5500	60	5,5	5	315

Typ M: fin spacing 6 mm

SD.M.30.1.04-4M	1,5	1300	6	0,8	1	315
SD.M.30.1.06-4M	2,0	1150	9	1,2	1	315
SD.M.30.2.04-4M	3,0	2600	12	1,4	2	315
SD.M.30.2.06-4M	4,0	2300	18	2,2	2	315
SD.M.30.3.04-4M	4,7	3900	18	2,2	3	315
SD.M.30.3.06-4M	6,1	3450	27	3,8	3	315
SD.M.30.4.04-4M	6,4	5200	24	2,7	4	315
SD.M.30.4.06-4M	8,2	4600	36	4,5	4	315
SD.M.30.5.04-4M	8,0	6500	30	3,3	5	315
SD.M.30.5.06-4M	10,3	5750	45	5,5	5	315